
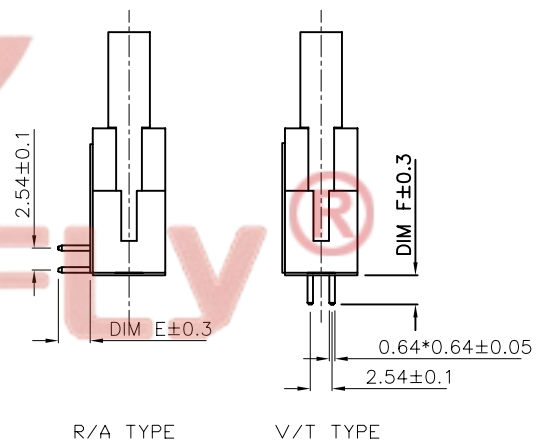
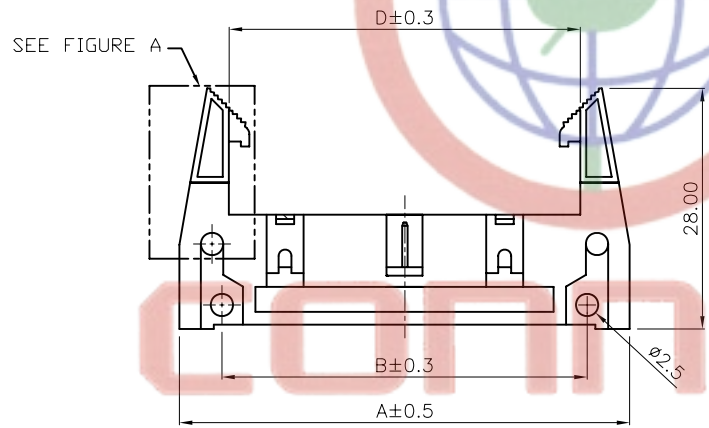


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 04/27/05'	~	卢金春
B	ADD DIM	LL 09/21/06'	~	卢金春
C	胶芯加胶	YCH 04/09/08'	~	卢金春
D	整理图面	YCH 07/06/09'	~	卢金春
E	ADD P/N CODE	YCH 12/02/13'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:  
 DS1011- X X X X X X - X  
 PLATING LEVEL(FOR GOLD ONLY) ⑤  
 3A: 0.8-1.2u" AA: LEVEL AA  
 A: LEVEL A B: LEVEL B  
 D: LEVEL A N: LEVEL N  
 LOCK DIM.  
 7: 7.90mm(standard)  
 4: 4.50mm(special)  
 HOUSING COLOR  
 B:BLACK  
 CONTACT PLATING  
 Si: Full Gold flash  
 HOUSING TYPE  
 B: BIG LATCH HOUSING  
 MOUNTING TYPE  
 S: STRAIGHT  
 R: R/A  
 No.OF CONTACTS  
 10 14 16 20 26 30  
 34 40 50 60 64

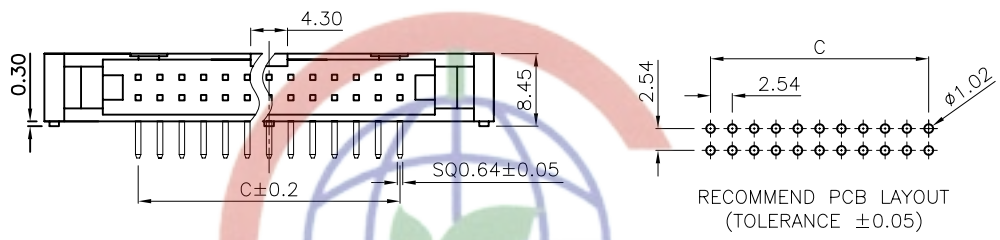

R/A TYPE

Latch Type	DIM.	E
Standard Latch		3.70

V/T TYPE

Latch Type	DIM.	F
Standard Latch		3.10
Standard Latch		8.10

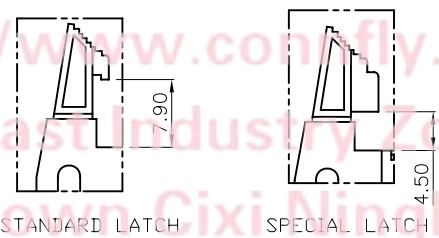
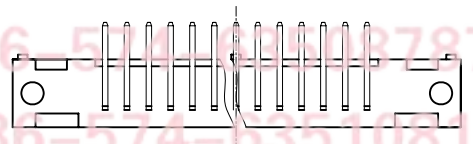


FIGURE A

AVAILABLE DIMENSION TABLE

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.1	37.18	39.72	44.80	52.42	57.50	62.58	70.20	82.90	95.60	100.68
B	22.20	27.28	29.82	34.90	42.52	47.60	52.68	60.30	73.00	85.70	90.78
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.10	23.18	25.72	30.47	38.42	43.50	48.58	56.20	68.90	81.60	86.68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	2.54mm SHROUDED HEADER
UNITS	mm		R/A & V/T TYPE
SHEET SIZE	A4	SERIES	DS1011 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1011-XXBXXX-X-E		

**晨翔电子有限公司**  
**CONNFLY® CONNFLY ELECTRONIC CO., LTD**

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuanYan  
 Town Cixi Ningbo China  
 P.C:315333