

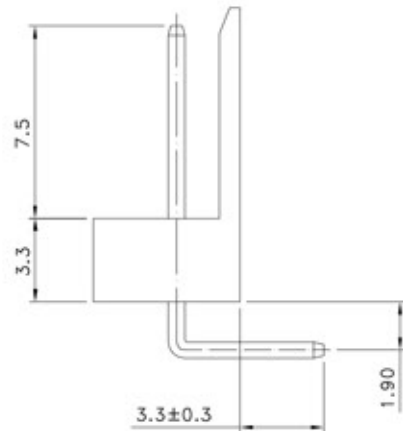


Recommend PCB Layout

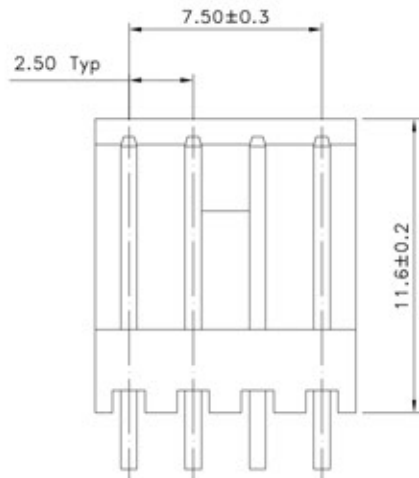


■ SPECIFICATIONS

- Voltage Rating : 250V AC/max
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max.

■ WAFER

- Part No. : JS-1116-04WR
- Poles : 4 (Right Angle)
- Material : Contact : Brass , Tin Plated  
Base : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs./Bag

 喬訊電子工業股份有限公司 CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.	APPROVED BY	SCALE	UNIT	TOLERANCE		LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
	林宗	1:1	mm	.0	±0.3	ECR	RoHS compliant	06/04/01			
PART NO	JS-1116-04WR	CHECKED BY	PROJ	VER. NO.	.00	±0.2	ECR	200610-001	06/10/13		
		黃科源		a6	.000	±0.1	ECR	DG 200612-006	06/12/19		
2.50mm Disk Drivr Power Connectors Wafer (Right Angle)		DRAWN BY	DATE	SIZE	ALL	±	ECR	DG 200704-007	07/04/24	CUSTOMER	
		黃科源	2008/09/02	A4	ANGLE	0°	±	ECR	200809-002		
										Conforms to The RoHS Instruction	