
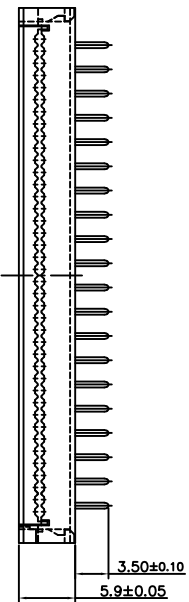
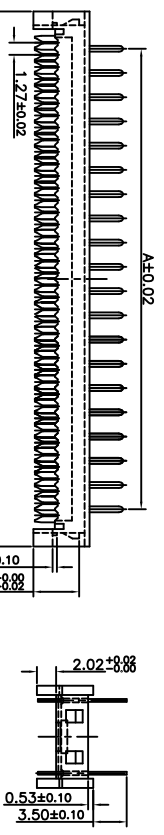
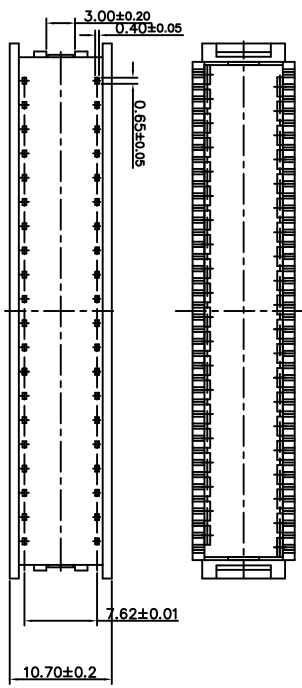


REV	ECN NO.	DATE
A		

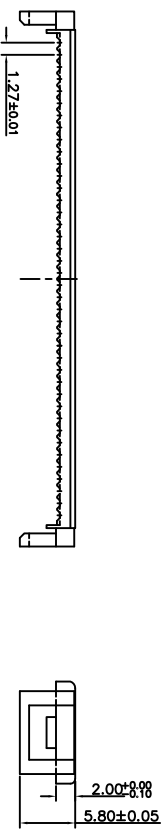

▽ DIP2 PITCH 2.54MMX7.62MM I.D.C. DIP PLUG
FOR PITCH 1.27MM CENTER FLAT RIBBON CABLE

MATERIAL & FINISH
*INSULATOR:PBT+GLASS FIBER UL 94V-0
*CONTACT:BRASS
*FINISH: GOLD-PLATED OVER NICKEL
SPECIFICATIONS
*CURRENT RATING: 1A AC,DC
*VOLTAGE RATING: 250V AC,DC
*TEMPERATURE RANGE: -40°C TO +105°C
*CONTACT RESISTANCE: 20MΩ MAX
*INSULATION RESISTANCE: 1,000MΩ MIN
*WITHSTANDING VOLTAGE: 500V AC/MIN

PART NO	DIM A	DIM B	PART NO	DIM A	DIM B
DIP2-08	7.62	15.42	DIP2-24	27.94	35.74
DIP2-10	10.16	17.96	DIP2-26	30.48	38.28
DIP2-14	15.24	23.04	DIP2-28	33.02	40.82
DIP2-16	17.78	25.58	DIP2-34	40.64	48.44
DIP2-18	20.32	28.12	DIP2-40	48.26	56.06
DIP2-20	22.86	30.66			

DIMENSIONS:MM

SIGNATURE	DATE	TITLE:	CODE NO.	TOLERANCE:	COMERCIO EXTERIOR LTDA.
邱平	2002/04/25	IDC DIP PLUG PITCH2.54mm*7.62mm	CUS. NO.	XX.	
CHK.		C.Y. P/N:	SCALE	X.	DRAWING NO.
APP.			UNIT	XX ±0.10	
		CUS. P/N:	PAGE	ANG.	DIP0.1"±0.3

PENZEL

