
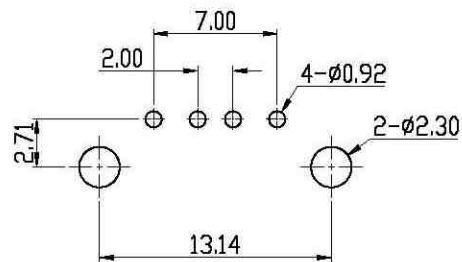
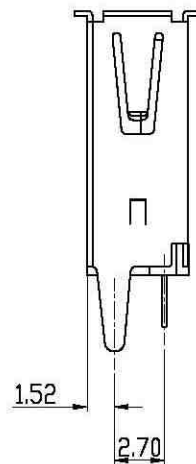
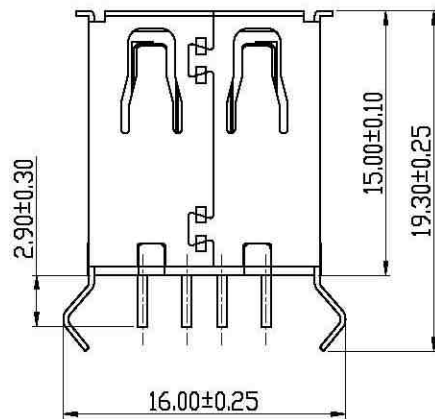


000

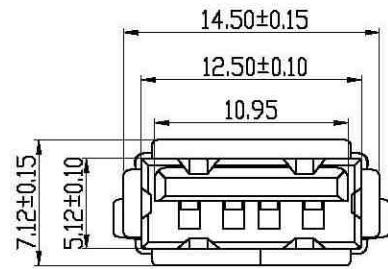

REV.	DESCRIPTION	DATE	DEVISER	APPROVED
A/0	The last word	06/04/10	W.X.Y	

Specification

- 1.Voltage Current Rating:1AMP.30V AC
- 2.Insulation Resistance:1000M Ω Min
- 3.Contact Resistance:30m Ω Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C

NOTE:

Tolerances unless otherwise specified:
 0-10:±0.15; 10-20:±0.20; 20-30:±0.25

PART NO EXPLAIN:

USB-A1D41F-□□4□

- Shell Plate spec: T=Plateg tin, N=Plateg nickel
- Housing Color: B=Black, N=Nature, W=White
- Contact Plate spec: 0=FU*, 1=3U*, 2=6U*, 3=15U*, 4=30U*

3	SHELL	C2680	1	T=0.30 Plateg nickel/Tin
2	Housing	P.B.T	1	UL94V-0 Nature/Black/White
1	Contact	C2680	4	T=0.25 Plateg Gold
NO.	VARIETY	MATERIAL	QT,Y	REMARK

PENZEL COMERCIO EXTERIOR LTDA.

UNIT:	mm	DEVISER:	W.X.Y	TITLE: USB A TYPE(FEMALE) 180° DIP			
3RD:		DESIGN:	W.X.Y				
SCALE:	1:1	APPRD:		SHEET:	1	PART NO:	USB-A1D41F-□□4□
REV:	A/0	EXAMINE:		CHART NO:	1014-0041	MATE NO:	