Rev.	Date	Description
A	2004/12/23	New Drawing

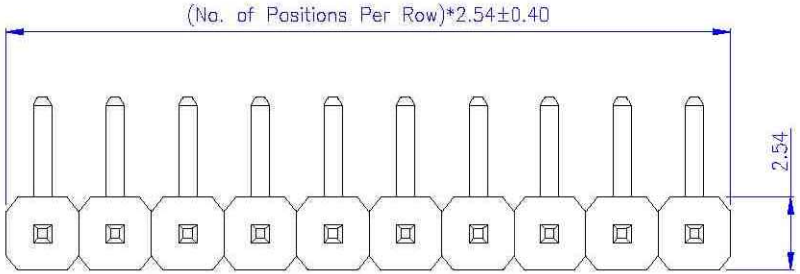

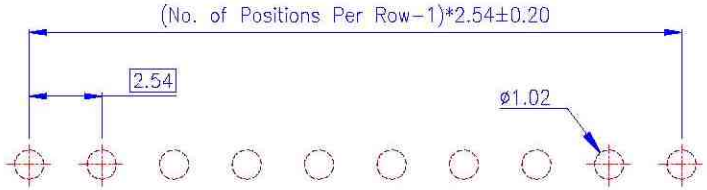

PCB Layout
(Top View)

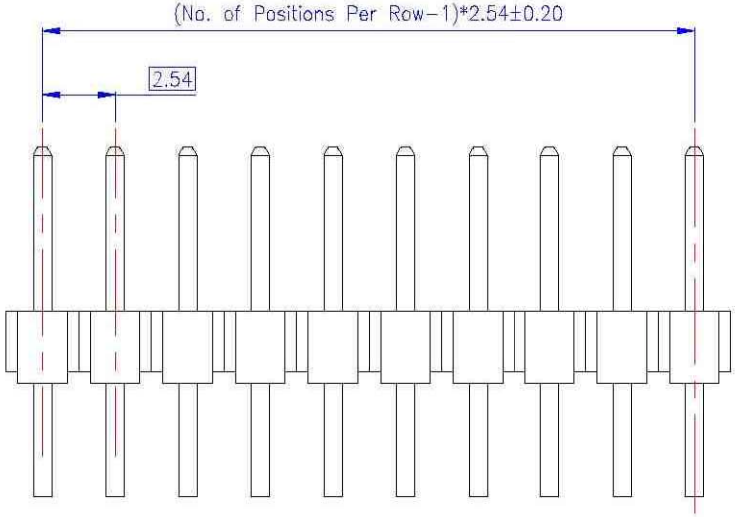

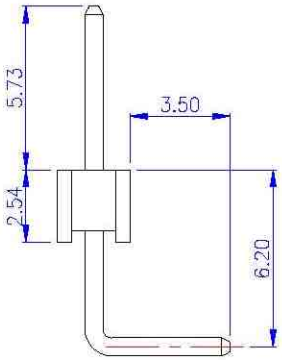

Standard Housing

JS-1110-XXBR

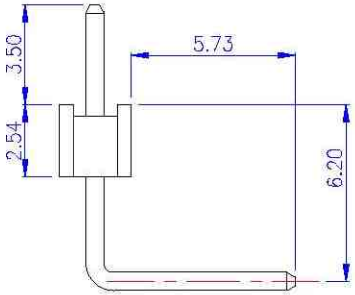

Reverse Housing

JS-1110-XX

Order Information

230405 - ** 1 **

Terminal Plating Options
00: Gold Flash
30: 10u" Gold
40: 15u" Gold
T: Tin

No. of Positions Per Row

PENZEL COMERCIO EXTERIOR LTDA.

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Sq 0.64mm, Gold Plating.	1. Current Rating: 1.0 Amp. Max.. 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.	1. Operating Temperature: -55°C ~ +105°C

Tolerance		Scale	Unit	Drawn By	Checked By	Approved By
0.0	±0.30	1 : 1	mm	Naosei	Amanda	Alex
0.00	±0.20					
0.000	±0.10	Drawing No.		HD2304-101		

Title
2.54mm Post Header
PCB Mount Right Angle Type
Single Row