


Section A-A

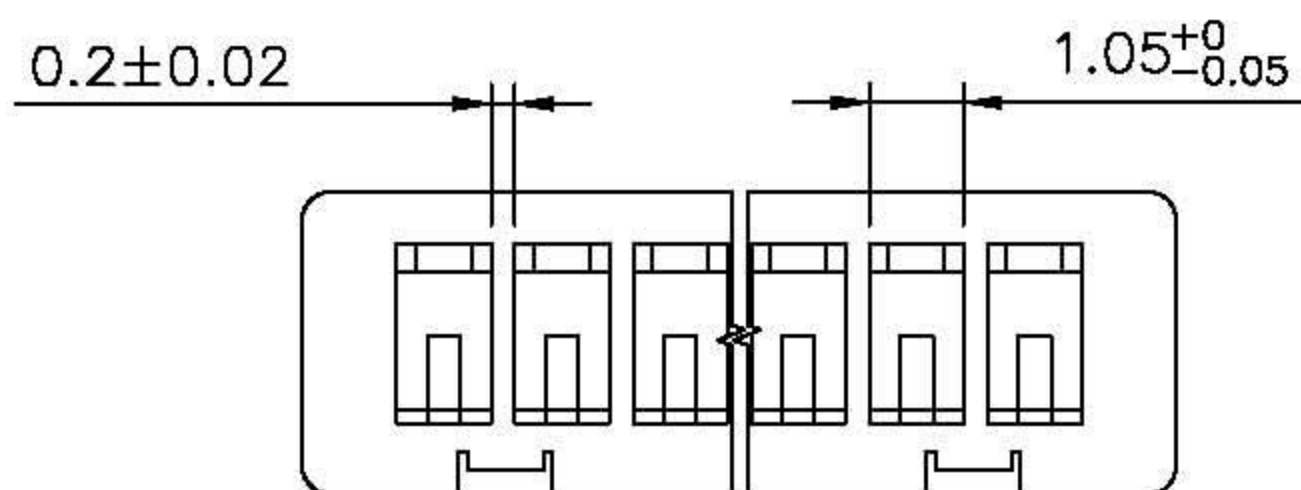

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 250V AC /minute
- Insulation Resistance : 100MΩ min
- Temperature Range : - 40°C to + 85°C
- Contact Resistance : 20mΩ max

■ HOUSING

- Part No. : JS-1146-XXX
 JS-1146-XX : GP Produces
 JS-1146-0XX : Non GP Produces
- Poles : 2 - 15
- Material : Nylon 66 UL94V-0
- Q' ty : 1,000 Pcs./Bag

Poles	Part No.	Dimensions (mm)		
		A	B	C
2	JS-1146-02	1.25	4.25	2.95
3	JS-1146-03	2.50	5.50	4.20
4	JS-1146-04	3.75	6.75	5.45
5	JS-1146-05	5.00	8.00	6.70
6	JS-1146-06	6.25	9.25	7.95
7	JS-1146-07	7.50	10.50	9.20
8	JS-1146-08	8.75	11.75	10.45
9	JS-1146-09	10.00	13.00	11.70
10	JS-1146-10	11.25	14.25	12.95
11	JS-1146-11	12.50	15.50	14.20
12	JS-1146-12	13.75	16.75	15.45
13	JS-1146-13	15.00	18.00	16.70
14	JS-1146-14	16.25	19.25	17.90
15	JS-1146-15	17.50	20.50	19.20

PENZEL COMERCIO EXTERIOR LTDA.	APPROVED BY	SCALE	UNIT	TOLERANCE		LTR	REVISION RECORD	DATE
	林陳鏞	6:1	mm	.0	±0.3			
PART NO JS-1146-XX	CHECKED BY	PROJ	VER NO.	.00	±0.2			
	林勇生	⊕	□	.000	±0.1			
1.25mm Crimp Style Connectors Housing	DRAWN BY	DATE	SIZE	ANGLE				
	邱森鴻	2004/12/31	A4	0°	±			
				.0°	±			