
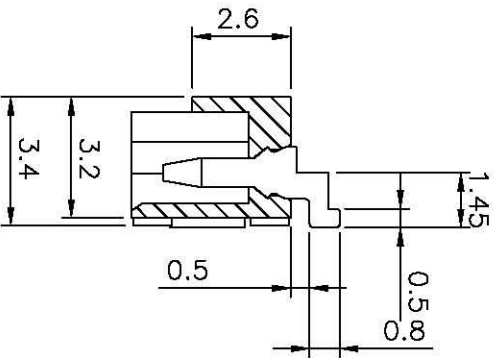


RECOMMEND PCB LAYOUT

- SPECIFICATIONS**
- Voltage Rating : 250V AC/DC
  - Current Rating : 1A AC/DC
  - Withstanding Voltage : 250V AC /minute
  - Insulation Resistance : 100M Ω min
  - Temperature Range : -40°C to +85°C
  - Contact Resistance : 20m Ω max

**■ WAFER**

- Part No. : JS-1147H-XXX (SMT Type)
- JS-1147H-XX : GP Produces
- JS-1147H-0XX : Non GP Produces
- Poles : 2 - 15
- Material : Contact : Brass, Tin Plated  
Base : Nylon PA46 UL94V-0
- Finish : Tin Plated
- Q'ty : 1,500 pcs./Tape & Reel

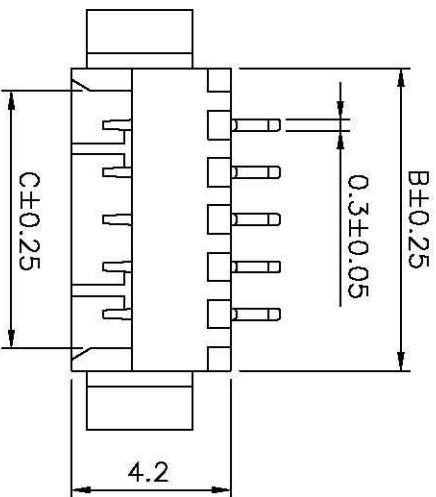

Poles	Part No.	Dimensions (mm)			
		A	B	C	D
2	JS-1147H-02	1.25	4.25	3.05	7.25
3	JS-1147H-03	2.50	5.50	4.30	8.50
4	JS-1147H-04	3.75	6.75	5.55	9.75
5	JS-1147H-05	5.00	8.00	6.80	11.00
6	JS-1147H-06	6.25	9.25	8.05	12.25
7	JS-1147H-07	7.50	10.50	9.30	13.50
8	JS-1147H-08	8.75	11.75	10.55	14.75
9	JS-1147H-09	10.00	13.00	11.80	16.00
10	JS-1147H-10	11.25	14.25	13.05	17.25
11	JS-1147H-11	12.50	15.50	14.30	18.50
12	JS-1147H-12	13.75	16.75	15.55	19.75
13	JS-1147H-13	15.00	18.00	16.80	21.00
14	JS-1147H-14	16.25	19.25	18.05	22.25
15	JS-1147H-15	17.50	20.50	19.30	23.50

**PENZEL COMERCIO EXTERIOR LTDA.**

PART NO JS-1147H-XX

1.25mm Crimp Style Connectors Wafer <SMT>

APPROVED BY

林陳樂

SCALE

5:1

UNIT

mm

TOLERANCE

.0 ±0.3  
.00 ±0.2  
.000 ±0.1

LTR

REVISION RECORD

DATE

CHECKED BY

林勇生

PROJ

邱森鴻

VER NO.

Q

ANGLE

0° ±

DRAWN BY

DATE

SIZE

0° ±

邱森鴻

2004/12/31

A4

0° ±