

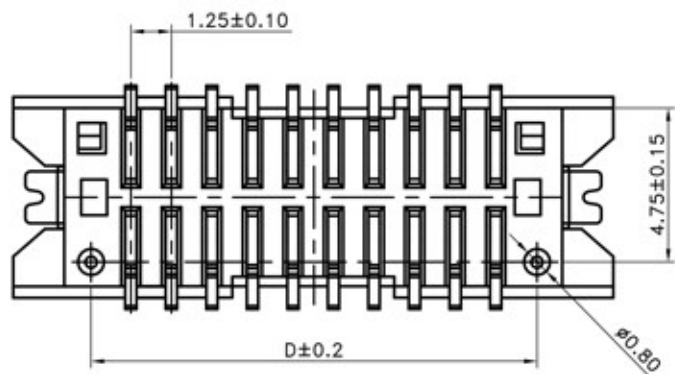



Recommended P.C.B. Layout

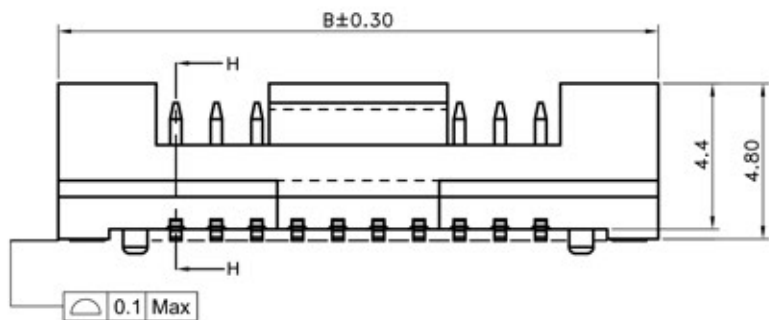

With Bulge(Standard) Without Bulge

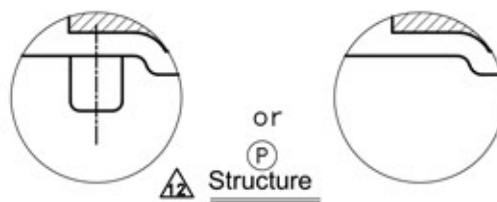

■ SPECIFICATIONS

- Voltage Rating : 150V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min.
- Temperature Range : - 35 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 30m Ω max.

■ WAFER

Part No. : JS-1256-XXx2-XX(XX)-XX XX-XX
① ② ③ ④ ⑤ ⑥

Code No :

- ① Poles : 10,20,30,40
- ② Bulge : Blank : With Bulge
WB : Without Bulge
- ③ Contact Plated : Blank : Gold
NM : Matte - Tin
- ④ Base Material : Blank : Nylon PA 9T UL94V-0
H1 : Nylon PA 6T / 66 UL94V-0
- ⑤ Base Color : Blank : Natural
BK : Black
- ⑥ Halogen : Blank : Normal
NH : Halogen Free
- Material : Contact : Phos.Bronze
Base : Refer Above Options
- Packing : Tape/Reel

Poles	Dimension(mm)			
	A	B	C	D
10	5.00	12.10	8.10	7.50
20	11.25	18.35	14.35	13.75
30	17.50	24.60	20.60	20.00
40	23.75	30.85	26.85	26.25



喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-1256-XXx2-XX(XX)-XXXX-XX

1.25mm Crimp Style Connectors Wafer <SMT>

APPROVED BY	SCALE	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞	mm	.0 ±0.30	△	ECR 201002-005	黃科源	2010/02/09				
CHECKED BY	PROJ	.00 ±0.20	△	ECR 201002-005	林文泰	2010/02/09				
黃科源	VER NO.	.000 ±0.10	△	合併圖面	吳弘文	2012/06/20				
DRAWN BY	DATE	SIZE	ANGLE	修正無導柱編碼	吳弘文	2012/07/24				
吳弘文	2013/05/08	A4	0° ±1°	產品外觀&PIN數修正	吳弘文	2013/02/27				
			.0° ±	物性表Poles修正	吳弘文	2013/05/08				
			SHEET	1/1						

CUSTOMER
Conforms to The RoHS Instruction