

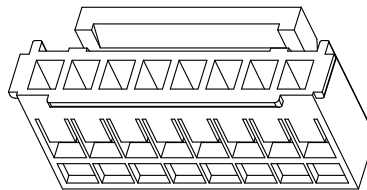
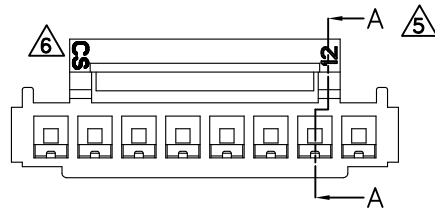

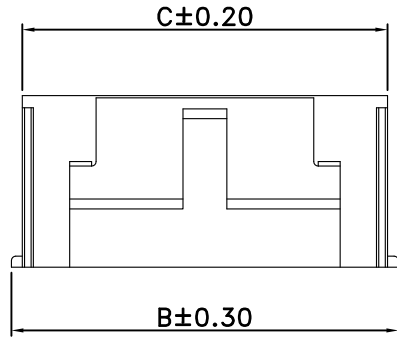


SECTION A-A
⑤

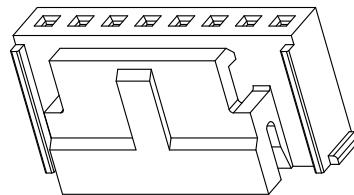

8PN 3D VIEW

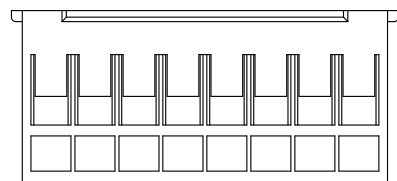

■ SPECIFICATIONS



- Voltage Rating : 250V AC/DC ④
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 105°C ④
- Contact Resistance : 20mΩ max ④

■ HOUSING



- Part No. : JS-2003-XX
①

- ① Poles : 2-16
- Material : Nylon66 UL94V-0
- Q' ty : 1,000 pcs./Bag



Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2	2.0	5.6	4.6	10	18.0	21.6	20.6
3	4.0	7.6	6.6	11	20.0	23.6	22.6
4	6.0	9.6	8.6	12	22.0	25.6	24.6
5	8.0	11.6	10.6	13	24.0	27.6	26.6
6	10.0	13.6	12.6	14	26.0	29.6	28.6
7	12.0	15.6	14.6	15	28.0	31.6	30.6
8	14.0	17.6	16.6	16	30.0	33.6	32.6
9	16.0	19.6	18.6				



4~16Pin Circuit



3Pin Circuit



2Pin Circuit



喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-2003-XX
2.00mm Crimp Style Housing Connector

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	④	ECR 200804-030	黃科源	2008/04/30	④			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	④	4-5P改為雙卡勾	金飛	2010/06/23	④			
周家慶	④	a6	.000 ±0.10	④	ECR201101004	金飛	2011/01/24	④			
DRAWN BY	DATE	SIZE	ANGLE								
曾慶根	2017/04/14	A4	0° ±1°	⑤	修改A尺寸公差, 修改物性表	張逸維	2012/11/28				
			0° ±	⑥	修改SECTION A-A 剖面圖示	張逸維	2012/12/27				
			SHEET	1/1	變更LOGO位置	曾慶根	2017/04/14				

CUSTOMER
Conforms to The RoHS Instruction