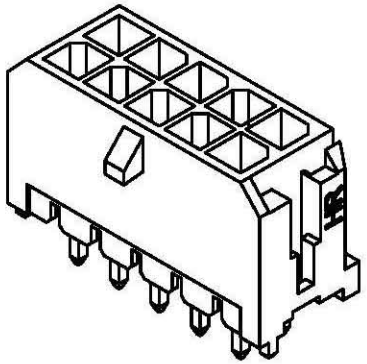

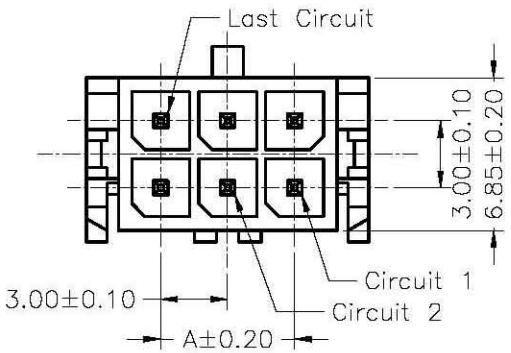

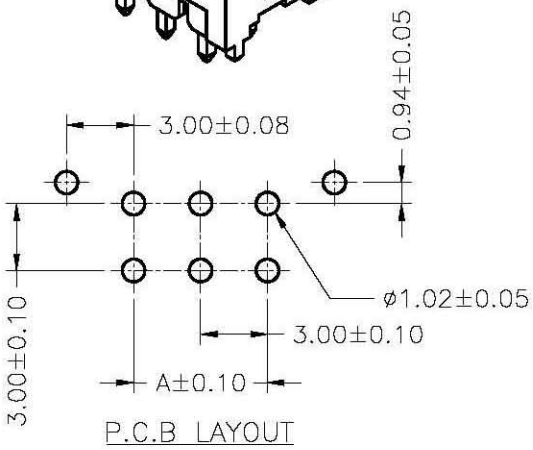

P.C.B LAYOUT

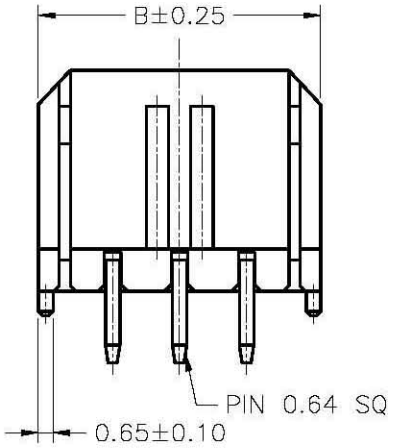

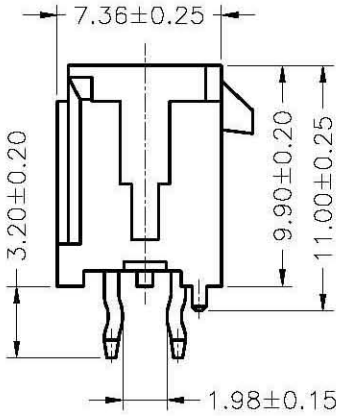

SPECIFICATIONS
Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: −25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin−plated
Material: PBT30%GF,UL94V−0
Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C3030WV−F−2X1P	−−−	6.65
C3030WV−F−2X2P	3.00	9.65
C3030WV−F−2X3P	6.00	12.65
C3030WV−F−2X4P	9.00	15.65
C3030WV−F−2X5P	12.00	18.65
C3030WV−F−2X6P	15.00	21.65
C3030WV−F−2X7P	18.00	24.65
C3030WV−F−2X8P	21.00	27.65
C3030WV−F−2X9P	24.00	30.65
C3030WV−F−2X10P	27.00	33.65
C3030WV−F−2X11P	30.00	36.65
C3030WV−F−2X12P	33.00	39.65

REV.	DESCRIPTION	DATE
B0	NEW RELEASE	2005.12.14

PENZEL COMERCIO EXTERIOR LTDA.

UNIT	SCALE	SHEET
mm		1 of 1

DRAWN BY	APPROVED BY
董正一 2001.02.01	董正一 2001.02.01

GENERAL TOLERANCE
X.X±0.25
X.XX±0.15
X.XXX±0.05
ANGLE±

TITLE:
3.00mm PITCH
180°WAFER,
MICRO-FIT

DRAW NO.: C3030WV-F-2XNP
REV. B0