
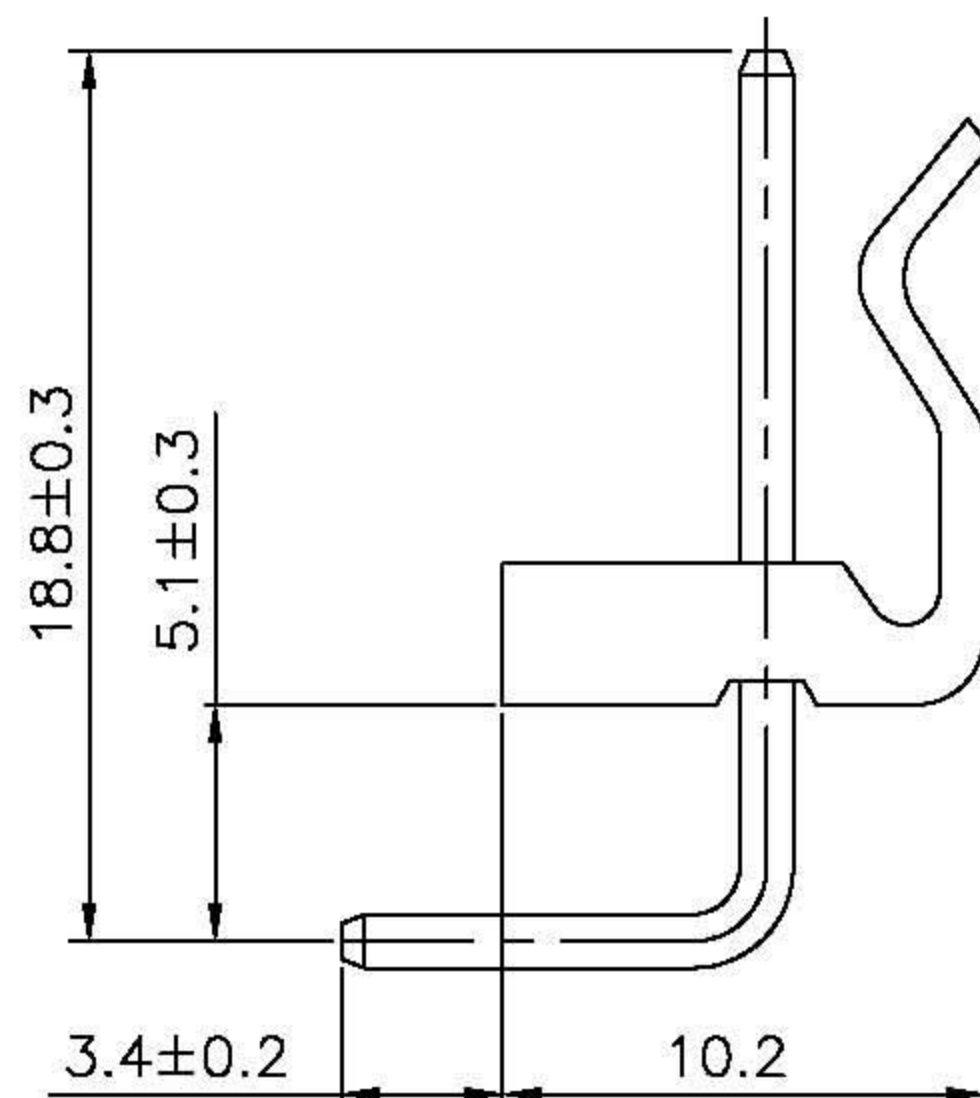


Recommmand PCB Layout

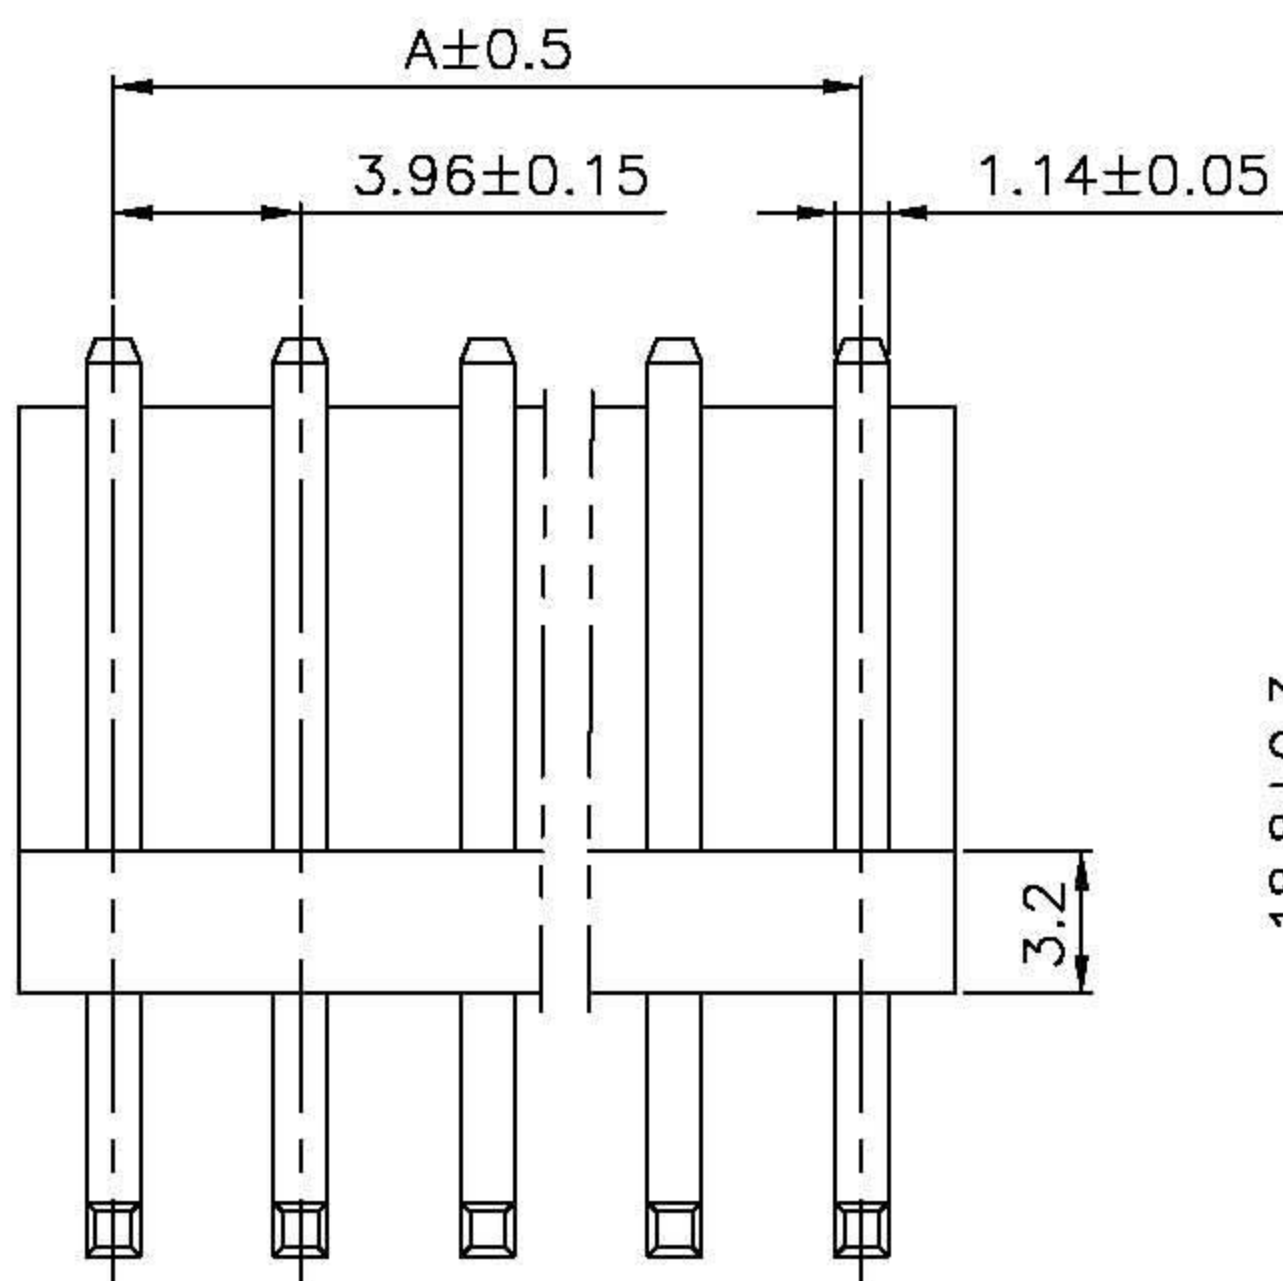

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max

■ WAFER

- Part No. : JS-4001R-XXX (Right Angle)
JS-4001R-XX : GP Produces
JS-4001-0XX : Non GP Produces
- Poles : 2 - 14
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1,000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
2	JS-4001R-02	3.96	7.92
3	JS-4001R-03	7.92	11.88
4	JS-4001R-04	11.88	15.84
5	JS-4001R-05	15.84	19.80
6	JS-4001R-06	19.80	23.76
7	JS-4001R-07	23.76	27.72
8	JS-4001R-08	27.72	31.68
9	JS-4001R-09	31.68	35.64
10	JS-4001R-10	35.64	39.60
11	JS-4001R-11	39.60	43.56
12	JS-4001R-12	43.56	47.52
13	JS-4001R-13	47.52	51.48
14	JS-4001R-14	51.48	55.44

PENZEL COMERCIO EXTERIOR LTDA.

APPROVED BY	SCALE	UNIT	TOLERANCE	
林陳鏢	3:1	mm	.0	±0.3
CHECKED BY	PROJ	VER NO.	.00	±0.2
林勇生		Ø	.000	±0.1
DRAWN BY	DATE	SIZE	ANGLE	
邱森鴻	2004/12/31	A4	0°	±
			.0°	±

LTR

REVISION RECORD

DATE

PART NO JS-4001R-XX
3.96mm Crimp Style Connectors Wafer